

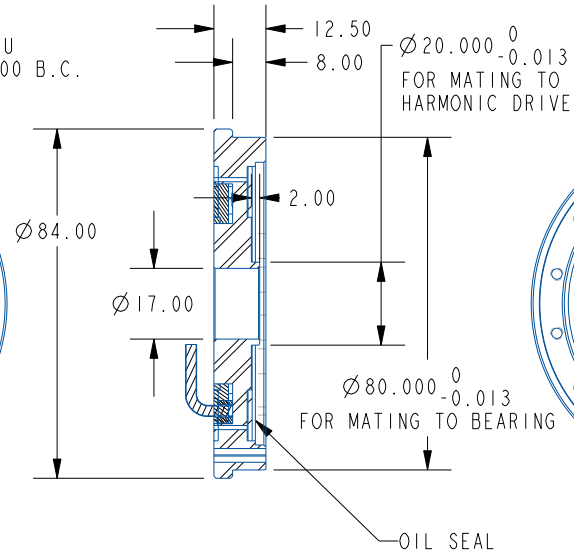


16X $\text{M3}\nabla$  5.4-5.6  
22.5° EQ. SPACE

8X $\text{M6}$ THRU  
ON $\text{Ø}30.00$  B.C.

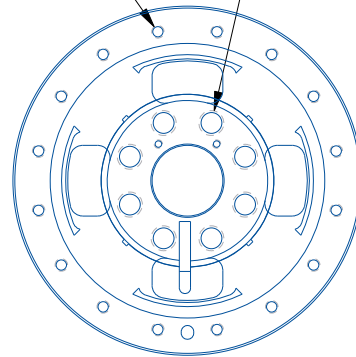

16X $\text{M3}\nabla$  6.7-6.9

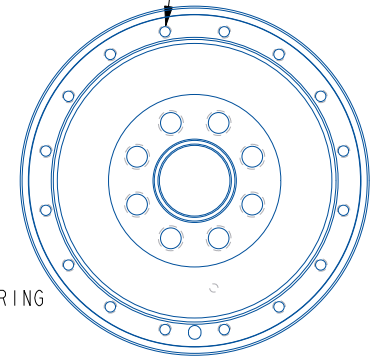

NOTE: THE OVERLOAD CAPACITIES FOR BENDING MOMENT, AXIAL AND RADIAL FORCE EXCEED 300% OF THOSE USED FOR CROSSTALK MEASUREMENT

M2210G IS DESIGNED TO MATE TO HARMONIC DRIVE AND BEARING DIRECTLY

### SPECIFICATIONS

CAPACITY (Nm)	150
OVERLOAD CAPACITY (%F.S.)	250
OUTPUT @ F.S. (V) NOMINAL	2.5±2 *
POWER SUPPLY (V)	4.5-5V, 25MA
BRIDGE RESISTANCE ( $\Omega$ ) NOMINAL	350
NON-LINEARITY (%F.S.)	0.5
HYSTERESIS (%F.S.)	1.0
OPERATING TEMP. RANGE (°C)	-20 TO +85
CROSSTALK (%F.S.)	1.0
AXIAL FORCE FOR CROSSTALK (N)	500
RADIAL FORCE FOR CROSSTALK (N)	500
BENDING MOMENT FOR CROSSTALK (Nm)	50
TORSION ANGLE (CALCULATED)	0.05°
TORSIONAL STIFFNESS (KNm/RAD)	170
MASS (KG)	0.32

\* WHEN PWR SUPPLY IS 4.5V, OUTPUT WILL BE 2.25±1.75V

DRAWING IN THIRD ANGLE PROJECTION

### WIRING CODE

COLOR	FUNCTION
RED	+EX
GREEN	+SIG
BLACK	GND
BROWN	-SIG

**SUNRISE INSTRUMENTS**

[www.srisensor.com](http://www.srisensor.com)

SINGLE AXIS TORQUE LOADCELL  
D84MM, 150 Nm

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN MM

M2210G

REV.  
A1